


AU-FTU the new universal Attema Fiber Termination Unit



COMPACT AND EASY TO UNDERSTAND

The Attema universal FTU is an extremely compact fiber termination unit that can be used as the endpoint of a passive optic fiber network for the residential or small business market. The FTU can be sealed, offers mechanical protection and is characterised by a systematic order of assembly. There is space for maximum two fiber cables. The product has been tested extensively and complies with all the usual requirements and standards. This means the FTU is a safe, rapid and simple solution.

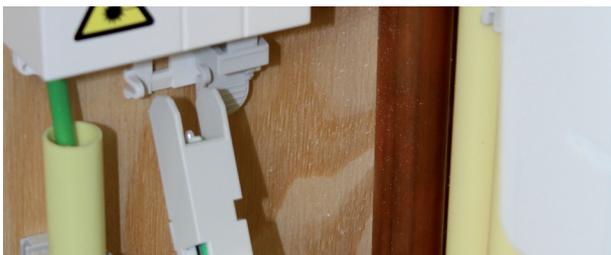

The AU-FTU forms the link between the passive optic fiber network and the operator's active part. The end-user can easily set up the connection between the passive optic fiber network and the active equipment, such as a fiber optic modem, CPE or NT, using a standard patch cable provided with the supplied insertable modules, without any possibility of error or fault.

INSTALL OPTIC FIBER SAFELY, RAPIDLY AND SIMPLY

Attema is constantly on the lookout for innovative and sustainable solutions, so that we are in a position to meet the demands and requirements of the optic fiber market. We do this in close cooperation with contractors, users, customers and suppliers. Our universal Fiber Termination Unit is a new solution that will save you time and money.

All benefits at a glance

- Extremely compact and streamlined shape
- Standard with connection buses SC / APC provided with integrated dust seal
- Simple, clean and safe patch connection made with insertable module
- Can be sealed on both the passive and the active sides
- Time-saving through the systematic assembly sequence
- Can be used pre-installed as well

Innovative ideas for a changing world.



Technical specifications

Product number:	29100
Material:	Plastic, halogen-free
Dimensions:	Length = 150 mm Width = 80 mm Height = 38 mm
Weight:	0.2 kg
Colour FTU:	White
Connector clamps:	Grey
Incoming customer cables:	Ø 2 mm up to Ø 8 mm
Number of incoming cable ports:	1
Number of connection buses SC / APC:	2
Capacity of connector part:	2 ANT / mini-heatshrink of heatshrink Ø 2.4 x 45 mm
Fiber bending radius:	R = 23 mm
Fiber loop length:	25 cm

The required pigtails and patch cords are not supplied.

This provides freedom of choice in the fiber optic concept and brand to be used.

Packaged in units of 8 items using recyclable material and visibly marked with Attema product number 29100.

ASSEMBLY INSTRUCTIONS

The instructions for assembly may be downloaded from www.attema.com.



ATTEMA B.V.

Schelluinsestraat 1

4203 NJ Gorinchem

Postbus 58

4200 AB Gorinchem

T +31(0)183 650 650

E infra@attema.com

I www.attema.com



Innovative ideas for a changing world.